




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : <b>H04M</b>		A2	(11) International Publication Number: <b>WO 96/14701</b>
			(43) International Publication Date: 17 May 1996 (17.05.96)
(21) International Application Number: PCT/US95/14204		(81) Designated States: AL, AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, LS, MW, SD, SZ, UG).	
(22) International Filing Date: 31 October 1995 (31.10.95)			
(30) Priority Data: 08/332,102 31 October 1994 (31.10.94) US 08/449,266 24 May 1995 (24.05.95) US			
(60) Parent Application or Grant (63) Related by Continuation US 08/332,102 (CIP) Filed on 31 October 1994 (31.10.94)		Published Without international search report and to be republished upon receipt of that report.	
(71) Applicant (for all designated States except US): APOGEE 2000, INC. [US/US]; 1904 N. Adams Street, Arlington, WV 22201 (US).			
(72) Inventor; and (75) Inventor/Applicant (for US only): FINNIGAN, Paul, F. [US/US]; Suite 20, 101 Church Street, Los Gatos, CA 95032 (US).			
(74) Agent: LEVINE, Michael, L.; Steel Rives, Suite 2300, 900 S.W. Fifth Avenue, Portland, OR 97204-1268 (US).			

(54) Title: TELEPHONIC VOICE MESSAGE TRANSMISSION CONTROL METHOD

## (57) Abstract

The present invention is directed to a method of controlling transmission of voice messages or information via telephonic voice message systems, which are sometimes referred to as Voice Mail systems. Users of the system selectively specify voice message transmission instructions for controlling transmission of voice messages directed to them. Upon receipt of a user's voice message address, the voice message system determines whether the destination voice message address has a specified voice message transmission instruction previously selected by the recipient and processes the voice message in accordance with the instruction.

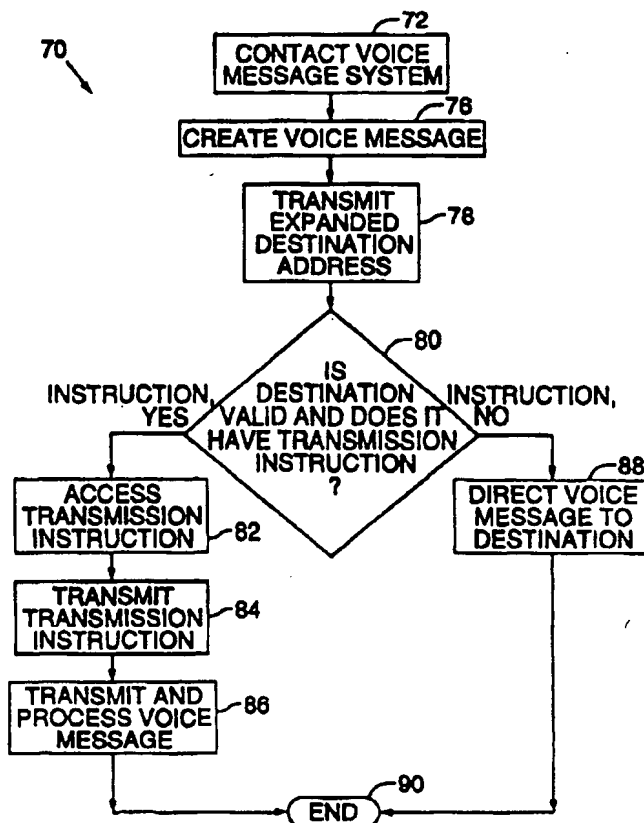

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

5

10

TELEPHONIC VOICE MESSAGE  
TRANSMISSION CONTROL METHOD

Technical Field

15

The present invention relates to telephonic voice message systems, sometimes referred to as Voice Mail systems and, in particular, to a method of controlling transmission of telephonic voice message data in such systems.

20

Background of the Invention

Electronic interpersonal communication may be conducted in a variety of formats including direct telephonic voice communication, facsimile document communication, electronic mail communication, and telephonic voice message communication. Facsimile document communication and electronic mail communication may be characterized as document-based, and the other two formats as voice-based.

25

Direct telephonic voice communication is unique among these formats in that it requires contemporaneous participation by all parties. In many business situations, the requirement for contemporaneous participation is unnecessary, disruptive, and time-consuming. As a consequence, the noncontemporaneous communication formats of facsimile document communication, electronic mail communication, and telephonic voice message communication are becoming preferred over direct telephonic voice communication for many situations.

30

35

With increasing volumes of information being transmitted by the different noncontemporaneous communication formats, recipients of the information can be burdened by the effort of sorting through and reviewing the information. In this regard, the document basis of facsimile and electronic mail communication formats allow a recipient to visually sort through large amounts of information relatively quickly.

In contrast, voice-based information or messages on telephonic voice message systems are reviewed aurally, which requires that the recipient review telephonic voice messages serially. With increasing numbers of telephonic voice messages, the review of messages by a recipient can become excessively time-consuming and burdensome.

This burden can be exacerbated because conventional telephonic voice message systems provide the recipient with little control over which information is received over the system. In contrast, some conventional communication systems other than telephonic voice message systems provide the recipient of the information with at least minor control over the information received. For example, some direct telephonic communication systems include features such as call forwarding. Some electronic mail systems include message notification prioritization based on the identity of the sending party. However, conventional telephonic voice message systems do not include such capabilities.

#### Summary of the Invention

An object of the present invention is, therefore, to provide a method of controlling transmission of telephonic voice message information.

Another object of this invention is to provide such a method in which the recipient controls the telephonic voice message data to be received.

A further object of this invention is to provide such a method in which the telephonic voice message data to be received is controlled according to the voice message system address of the sender.

5           The present invention is directed to a method of controlling transmission of voice messages or information via telephonic voice message systems. In a preferred embodiment, a person speaks into a telephone to create or originate a voice message to be sent to another person.  
10       The recipient of the message has an assigned address or "mailbox" on the telephonic voice message system analogous to a telephone number and referred to as the destination voice message address. The sender may have an assigned address on and also be a system user of the voice message  
15       system or may be a system visitor without a permanent system address and who, for example, accesses the system after an unsuccessful direct telephone call to the recipient.

          After the sender has originated the voice  
20       message, the sender directs the voice message to the recipient by sending the voice message and the destination address to the telephonic voice message system. In many systems, the originator keys the destination address number into a DTMF telephone keypad. Other voice message  
25       systems include voice recognition subsystems that allow the originator to enter the destination address merely by stating it. Upon receipt of the voice message and the destination address, the telephonic voice message system determines whether the destination voice message address  
30       is valid and whether it has a specified voice message transmission instruction previously selected by the recipient for controlling voice messages directed to the destination address.

          Preferably, a variety of voice message  
35       transmission instructions can be selected by the

recipient. The selectable voice message transmission instructions can include, for example, transmitting the telephonic voice message data to an alternate or additional voice message destination having a voice message address different from the destination voice message address, determining whether the origination address is included in a list of at least one acceptable origin address and transmitting the voice message to the destination only if the origination address is included in the preselected set, or determining whether the origination address is included in a list of at least one unacceptable origin address and blocking transmission of the voice message to the destination address whenever the origination address is included in the list.

The selectable voice message transmission instructions also can include assigning voice messages from a specified origination address with a delivery priority (e.g., high or low) that determines the sequence in which messages are retrieved by the recipient, or designating voice messages from a specified origination address as being private so the messages cannot be copied or forwarded. If the voice message system includes a voice recognition and conversion subsystem, the selectable voice message transmission instructions can include converting voice messages to electronic mail or facsimile documents and delivering them to a selected electronic mailbox or facsimile device, respectively.

Whenever the destination address has a specified voice message transmission instruction for controlling transmission of the telephonic voice message data, the voice message system processes the voice message according to the instruction. Whenever the destination address has no specified voice message transmission instruction for controlling transmission of the telephonic voice message data, the voice message is transmitted to the destination

address and stored for retrieval by the recipient, as in conventional operation of voice message systems.

Additional objects and advantages of this invention will be apparent from the following detailed description of a preferred embodiment thereof which  
5 proceeds with reference to the accompanying drawings.

#### Brief Description of the Drawings

Fig. 1 is a simplified schematic block diagram of a telephonic voice message system in which voice  
10 message transmission is controllable according to the method of the present invention.

Fig. 2 is a flow diagram showing a method of controlling voice message transmission in the system of Fig. 1 according to the present invention.

15 Fig. 3 is a simplified schematic block diagram of a pair of networked telephonic voice message systems in which voice message transmission is controllable according to the method of the present invention.

Fig. 4 is a flow diagram showing a method of controlling voice message transmission in the system of Fig. 3 according to the present invention.  
20

#### Detailed Description of Preferred Embodiments

Fig. 1 represents a generally conventional telephonic voice message apparatus or system 10 that  
25 controls transmission, delivery, and storage of voice messages, which are sometimes referred to as Voice Mail messages. Telephonic voice message system 10 may be of the type manufactured and sold by any of a large number of manufacturers that include VMI, Comverse, Centigram, Rolm,  
30 Northern, or Boston Technology. Exemplary models of voice message system 10 may include the INFINITY 2 manufactured by Comverse Technology Inc. of Woodbury, New York and the ONE-VIEW manufactured by Centigram Communications of San Jose, California.

Voice message system 10 may be telephonically accessed by multiple system users, each of which has an assigned message address or "mailbox," as well as system visitors who do not have assigned message addresses on voice message system 10. For reference purposes, voice message system 10 is shown connected to telephones 12 and 14 by which, respectively, a message sender (user A) and a message recipient (user B) access voice message system 10. It will be appreciated that telephones 12 and 14 may be located anywhere and can access voice message system through any switching or transmission systems, including a private branch exchange (PBX), local public switched telephone network (PSTN), or long distance or international telephone lines or channels. Telephones 12 and 14 require only basic capabilities (e.g., a DTMF keypad) to be operable with voice message system 10.

For purposes of clarity, message senders and recipients having assigned voice message addresses on voice message system 10 are referred to herein as system users. Voice message system 10 is also capable of receiving voice messages from others, who are referred to herein as system visitors. The following description is directed mainly to communication between system users A and B, but is similarly applicable to communication between a system visitor and either of system users A and B.

In conventional operation of voice message system 10, user A sends user B a voice message by telephoning voice message system 10 from telephone 12 and speaking into it to create a voice message or voice message data. Voice message system 10 automatically digitizes the voice message for storage. User A directs the voice message to its destination (e.g., user B) and adds any conventional sender delivery commands for voice message system 10 (e.g., message delivery priority) by



keying the destination message address and sender delivery command codes on the DTMF keypad of telephone 12. Alternatively, voice message system 10 includes a voice recognition subsystem that allows the sender to enter the destination address and any sender delivery commands merely by stating them.

Voice message system 10 associates the digitized voice message data with the destination message address and sender delivery commands and stores them for retrieval by the recipient (user B). Typically, voice message system 10 delivers to telephone 14 an indication that a message is available for retrieval by user B. Alternatively, user B may call voice message system 10 to check for any voice messages. In generally this manner, a system user A on virtually any voice mail system is able to send a voice message to another system user B.

In accordance with the present invention, users A and B, as well as any others of the many system users, can control the transmission of voice messages or information directed to their message addresses by selecting voice message transmission instructions that are stored on voice message system 10. With increasing numbers of telephonic voice messages and voice message system users, voice message transmission instructions selectable by the recipient can prevent voice message system 10 from becoming inconvenient or burdensome to use.

Fig. 2 is a flow diagram showing a preferred method 20 of controlling transmission of voice message data according to the present invention. Voice message transmission control method 20 is described with reference to communication between systems users A and B, but is similarly applicable to communication from a system visitor to a system user.

Process block 22 represents that user A makes telephone contact with voice message system 10. The

telephone contact with voice message system 10 may be specifically initiated by user A or user A may be automatically transferred to voice message system 10 as a result of attempting to make a direct telephonic call to user B.

5        Process block 26 represents that user A speaks into a telephone to create or originate for user B a voice message from which voice message system 10 generates and stores voice message data or information. Voice message system 10 also acquires and stores the message address for user B and any sender delivery commands selected by user A. As is known in the art, the message address for user B may be keyed into a DTMF telephone keypad by user A or may have been previously acquired by voice message system 10. 10        Alternatively, voice message system 10 includes a voice recognition subsystem that allows the sender to enter the destination address and any sender delivery commands 15        merely by stating them.

      Inquiry block 28 represents an inquiry whether 20        the destination message address is a valid address on voice message system 10 and whether there is a specified voice message transmission instruction previously selected by user B for controlling voice messages directed to the destination message address. For example, voice message 25        system 10 confirms whether the destination message address is a valid address and reviews a stored first listing of destination message addressees that have specified voice message transmission instructions.

      If the destination message address is valid and 30        has a specified voice message transmission instruction, inquiry block 28 proceeds to process block 30. If the destination message address is valid and does not have a specified voice message transmission instruction, inquiry block 28 proceeds to process block 34. If the destination

message address is not valid, an invalid address message is delivered to user A.

Process block 30 represents that voice message system 10 accesses the specified voice message transmission instructions for the destination message address from a stored listing of destination message addresses and associated specified voice message transmission instructions. It will be appreciated that voice message system 10 is analogous to a computer by being programmable and having large information storage capacity. Storing the listings and programming voice message system 10 to create, review and access the listings is within the capabilities of persons skilled in the art.

The selectable voice message transmission instructions can include, for example, transmitting the telephonic voice message data to an alternate or additional voice message destination having a voice message address different from the destination voice message address, determining whether the origination address is included in a list of at least one acceptable origin address and transmitting the voice message to the destination only if the origination address is included in the preselected set, or determining whether the origination address is included in a list of at least one unacceptable origin address and blocking transmission of the voice message to the destination address whenever the origination address is included in the list.

The selectable voice message transmission instructions also can include assigning voice messages from a specified origination address with a priority (e.g., high or low) that determines the sequence in which messages are retrieved by the recipient, or designating voice messages from a specified origination address as being private so the messages cannot be copied or

forwarded. If voice message system 10 includes a voice recognition and conversion subsystem, the selectable voice message transmission instructions can include converting voice messages to text data suitable for delivery as electronic mail to a selected electronic mailbox. The selectable voice message transmission instructions can further include converting the text data to a facsimile document suitable for delivery to a facsimile device.

User B selects voice message transmission instructions by keying corresponding command or selection codes on the DTMF keypad of telephone 14 in response to interactive voice prompts from voice message system 10. Alternatively, voice message system 10 includes a voice recognition subsystem that allows user B to select voice message transmission instructions merely by stating the corresponding command or selection codes. As another alternative, user B can select voice message transmission instructions by entering corresponding command or selection codes into voice message system 10 with a personal computer in communication with system 10.

Process block 32 represents that voice message system 10 processes the voice message data in accordance with any specified voice message transmission instruction.

Process block 34 represents that voice message system 10 directs the voice message data to the destination message address as a conventional voice message, stores it for retrieval by the recipient (user B), and provides an indication at telephone 14 that a voice message is available for retrieval. It will be appreciated that the internal operation of voice message systems from different manufacturers will vary. For example, directing voice message data to the destination message address may or may not include shifting or transmitting voice message data. With regard to the present invention, the signal processing details by which

a particular voice message system makes a voice message available for retrieval are not material.

Process block 36 represents that method 20 is completed.

5           Voice message transmission control method 20 has been described with reference to a single otherwise conventional voice message system 10. The voice message transmission control method of the present invention is also applicable to a network of at least two separate  
10   voice message systems. With the increased numbers of users and potential voice messages on such a network, recipient control over voice messages becomes particularly desirable.

Fig. 3 shows a telephonic voice message  
15   apparatus 40 having a pair of generally conventional telephonic voice message systems 50 and 52 that are operable independently and communicate with each other through a voice message system network 54. Telephonic voice message systems 50 and 52 are preferably similar to  
20   voice message system 10.

Voice message systems 50 and 52 may be telephonically accessed by multiple system users of either system, each system user having an assigned message address or "mailbox," as well system visitors who do not  
25   have message addresses on voice message system 50 or 52. For reference purposes, voice message systems 50 and 52 are shown connected to telephones 56 and 58 by which a message sender (user X) and a message recipient (user Y) access voice message systems 50 and 52, respectively.  
30   Telephones 56 and 58 provide substantially the same access to respective voice message systems 50 and 52 that telephones 12 and 14 provide to voice message system 10.

Voice message system network 54 includes network interface nodes or devices 60 and 62 through which voice  
35   message systems 50 and 52 access each other, as well as

other voice message systems connected to network 54 but not shown. Network interface devices 60 and 62 may be, for example, an APOGEE WORLDGATE manufactured by the assignee of this application. Network interface devices 5 60 and 62 are operable independently of and may each serve one or more voice message systems. Network interface devices 60 and 62 are interconnected by at least one telecommunication channel 64, which is preferably a high capacity digital telecommunication channel over which 10 large volumes of voice message data can be transmitted efficiently.

Due to the independent operability of voice message systems 50 and 52, the method by which a recipient controls voice messages directed to him preferably differs 15 from voice message transmission control method 20. Fig. 4 is a flow diagram showing a preferred method 70 of controlling transmission of voice message data between independently operable voice message systems 50 and 52 in accordance with the present invention. Voice message 20 transmission control method 70 is described with reference to communication between system users X and Y, but is similarly applicable to communication between a system user and a system visitor.

Process block 72 represents that user X makes 25 telephone contact with voice message system 50. The telephone contact with voice message system 50 would typically be specifically initiated by user X. If user X attempts to make a direct telephonic call to user Y and is redirected to a voice message system, user X typically 30 would be transferred to voice message system 52 with which user Y is associated. A voice message left by user X directly on voice message system 52 would preferably be processed by voice message transmission control method 20.

Process block 76 represents that user X speaks 35 into telephone 56 to create or originate for user Y a

voice message from which voice message system 50 generates and stores voice message data or information. Voice message system 50 also acquires and stores the message address for user Y and any sender delivery instructions selected by user X. As is known in the art, the destination message address may be keyed into a DTMF telephone keypad by user X or may have been previously acquired by voice message system 50. Alternatively, voice message system 50 includes a voice recognition subsystem that allows user X to enter the destination address and any sender delivery commands merely by stating them. Since the destination message address does not reside on voice message system 50, user X would typically have to enter an expanded destination message address that includes an indication that it resides on voice message system 52.

Process block 78 represents that expanded destination message address 58 is transmitted from voice message system 50 to associated network interface device 60.

Inquiry block 80 represents an inquiry whether the destination message address is a valid address on voice message system 52 and whether there is a specified voice message transmission instruction previously selected by user Y for controlling voice messages directed to the destination message address. In a first preferred embodiment, voice message system 50 transmits the expanded destination message address to associated network interface device 60, which forwards the destination message address over channel 64 to network interface device 62 associated with voice message system 52. Network interface device 62 confirms whether the destination message address is a valid address of voice message system 52 and reviews a stored first listing of destination message addressees that have specified voice

message transmission instructions. In this embodiment, information regarding valid addresses of voice message system 52 and their associated voice message transmission instructions are periodically transferred from system 52 to network interface device 62.

In a second preferred embodiment, the expanded destination message address is transmitted to voice message system 52 via network interface device 60, channel 64, and network interface device 62. Voice message system 52 confirms whether the destination message address is a valid address and reviews a stored first listing of destination message addressees that have specified voice message transmission instructions.

If the destination message address is valid and has a specified voice message transmission instruction, inquiry block 80 proceeds to process block 82. If the destination message address is valid and does not have a specified voice message transmission instruction, inquiry block 80 proceeds to process block 88. If the destination message address is not valid, an invalid address message is provided to one of the first voice message address, the voice message source, and user X.

Process block 82 represents that the specified voice message transmission instructions for the destination message address are accessed from a stored listing of destination message addresses and associated specified voice message transmission instructions. In the first and second preferred embodiments, the instructions are accessed by network interface device 62 and voice message system 52, respectively.

It will be appreciated that voice message systems 50 and 52 and network interface devices 60 and 62 are analogous to computers by being programmable and having large information storage capacity. Storing the listings on and programming voice message system 52 or



network interface devices 62 to create, review and access the listings is within the capabilities of persons skilled in the art. The voice message transmission instructions and manner of selecting them can include those described above with reference to voice message system 10. Alternatively, network 54 could provide operator assistance services by which user Y could select voice message transmission instructions by calling and informing a network operator of the instructions the user has selected.

Process block 84 represents that the voice message transmission instructions are transmitted to network interface device 60 via network interface device 62 and channel 64.

Process block 86 represents that voice message system 50 transmits the voice message data to network interface device 60, which processes the voice message data in accordance with any specified voice message transmission instruction.

Process block 88 represents that voice message system 50 directs the voice message data to the destination message address on voice message system 52 via network 54. Voice message system 52 stores the voice message data for retrieval by the recipient (user Y) and provides an indication at telephone 58 that a voice message is available for retrieval.

Process block 90 represents that method 70 is completed.

To control costs and message retrieval time, large entities using voice messaging need to regulate the originators of incoming voice messages and restrict the number of them. Significant costs include transient memory delivery system memory storage capacity, local access charges (e.g., 800 number or Bell Operating Company access charges), potential loss of opportunity (e.g.,

recipient is in different place and time from place and time of message transmission), and message transmission costs. The following example demonstrates the capability of the invention to achieve significant cost savings by allowing a recipient to block or re-route selected messages before they are transmitted to the recipient as designated by the message originator. For purposes of illustration only, the example is described with reference to the Fig. 3 embodiment.

10

## EXAMPLE

User X wants to leave a message for user Y. User X specifies certain delivery instructions such as routine delivery scheduling and nonconfidential message, but user Y has specified for messages addressed to him different message delivery instructions that include location re-routing, priority delivery, private message, encrypted message, and delivery certification. Processing of the message by user X proceeds as follows.

15

User X records a message on voice message system 50 and, upon completing his message, proceeds to other, unrelated activities. Voice message system 50 communicates with network interface device 60 to indicate the presence of the message user X left and gives delivery instructions including the delivery address, length, and urgency of the message. Network interface device 60 communicates the delivery instruction information across telecommunication channel 64 to network interface device 62, which in turn communicates with voice message system 52 to validate the delivery address and check for any alternative delivery instructions placed by user Y in either network interface device 62 or voice message system 52.

20

25

30

35

Voice message system 52 provides back to network interface device 62 the alternative instructions specified by user Y and a confirmation of a valid delivery address.

The alternative instructions and confirmation are then transmitted across telecommunication channel 64 to network interface device 60 to substitute the message delivery instructions of user Y for those of user X. Because user  
5 Y specified that messages addressed to him be re-routed, a significant cost saving is achieved as a consequence of the nontransmission of the message of user X to the original delivery address of user Y.

The processing of message setup instructions is  
10 analogous to that for real-time telephone call setup instructions and in both cases the cost is relatively low. Neither user X nor user Y incurs a cost above that of normal network overhead; therefore, the transmission of voice message transmission instructions achieves the  
15 savings objective for user Y.

In response to the change in message instructions, network interface device 60 can reroute the message in accordance with the alternative instructions, which at a minimal cost change the delivery address,  
20 priority, confidentiality, encryption, and certification to those specified by user Y. For, example, if user Y specifies an address on the same system as that of the address of user X, the only cost incurred to deliver the message would be the local access charge to point the  
25 message to the delivery address commanded by user Y.

This example demonstrates that no message originator or recipient is on line during message management processing of a previously recorded message, which processing is based on functions a message  
30 nonoriginator has defined. This example also shows the invention can be implemented in a local system, local area network (LAN), and wide area network (WAN) environment. Skilled persons will appreciate that the message management functions carried out by way of example with

reference to the Fig. 3 system can be distributed to other system components, such as those of the system of Fig. 1.

5 Skilled workers will recognize that the above-described voice message transmission example would also be applicable to other types of non-contemporaneous message transmission such as those found in facsimile document store and forward services and electronic mail, and that the communications medium employed need not be a telecommunications channel.

10 Skilled workers will further recognize that many changes may be made to the details of the above-described embodiment of this invention without departing from the underlying principles thereof. For example, voice message transmission control method 70 is described with reference  
15 to separate network interface devices 60 and 62 for respective voice message systems 50 and 52. As an alternative embodiment, voice message transmission control method 70 could operate with voice message systems 50 and 52 and only a single network interface device in direct  
20 communication with both message systems. The scope of the present invention should be determined, therefore, only by the following claims.

Claims

1. In a telephonic voice message apparatus having first and second voice message addresses, a method of controlling from the second voice message address transmission of telephonic voice message data originating from a voice message source associated with the first voice message address and directed to the second voice message address, comprising:
- generating telephonic voice message data associated with the first voice message address;
  - directing the voice message data associated with the first voice message address to the second voice message address;
  - determining within the telephonic voice message apparatus whether a specified voice message transmission instruction for controlling transmission of the telephonic voice message data is associated with the second voice message address;
  - whenever a specified voice message transmission instruction for controlling transmission of the telephonic voice message data is associated with the second voice message address, processing the telephonic voice message data in accordance with the specified voice message transmission instruction; and
  - whenever no specified voice message transmission instruction for controlling transmission of the telephonic voice message data is associated with the second voice message address, directing the telephonic voice message data to the second voice message address and storing the telephonic voice message data for retrieval therefrom.
2. The method of claim 1 in which the telephonic voice message apparatus includes first and second independently operable telephonic voice message systems and the first voice message address is within the first telephonic voice message system and the second voice

message address is within the second telephonic voice message system.

3. The method of claim 2 in which the telephonic voice message apparatus further includes an interface node that provides data communication between the first and second telephonic voice message systems, the interface node cooperating with the first and second telephonic voice message systems to determine whether the second voice message address is associated with a specified voice message transmission instruction for controlling transmission of the telephonic voice message data.

4. The method of claim 3 in which directing the second voice message address to the telephonic voice message apparatus includes transmitting the second voice message address from the first telephonic voice message system to the interface node, determining whether the second voice message address is associated with a specified voice message transmission instruction, and sending a query from the interface node to the second telephonic voice message system as to whether the second voice message address is associated with a specified voice message transmission instruction.

5. The method of claim 1 in which the specified voice message transmission instruction includes at least one of a predetermined set of voice message transmission instructions.

6. The method of claim 1 in which the voice message transmission instruction includes transmitting the telephonic voice message data to a third voice message destination having a third voice message address different from the second voice message address.

7. The method of claim 1 in which the voice message transmission instruction includes determining whether the first voice message address is included in a

first preselected set of at least one acceptable origin address and transmitting the telephonic voice message data to the second voice message address only if the first voice message address is included in the first preselected set.

8. The method of claim 1 in which the voice message transmission instruction includes determining whether the first voice message address is included in a preselected set of unacceptable origin addresses and blocking transmission of the telephonic voice message data to the second voice message address whenever the first voice message address is included in the preselected set of unacceptable origin addresses.

9. The method of claim 1 in which the voice message transmission instruction includes determining whether the first voice message address is included in a preselected set of addresses and assigning the voice message data a delivery priority for prioritizing retrieval of the voice message data from the second voice message address whenever the first voice address is included in the preselected set of addresses.

10. The method of claim 1 in which the voice message transmission instruction includes prohibiting the voice message data from being copied or forwarded.

11. In a telephonic voice message apparatus having first and second voice message addresses, a method of controlling from the second voice message address transmission of telephonic voice message data originating from a voice message source associated with the first voice message address and directed to the second voice message address, comprising:

selectively storing in the telephonic voice message apparatus a specified voice message transmission instruction for controlling transmission of telephonic

voice message data directed to the second voice message address;

directing the telephonic voice message data to the second voice message address;

5 determining within the telephonic voice message apparatus whether the second voice message address is associated with the specified voice message transmission instruction for controlling transmission of the telephonic voice message data;

10 whenever the second voice message address is associated with the specified voice message transmission instruction for controlling transmission of the telephonic voice message data, processing the telephonic voice message data in accordance with the specified voice message transmission instruction; and

15 whenever the second voice message address is not associated with the specified voice message transmission instruction for controlling transmission of the telephonic voice message data, directing the telephonic voice message data to the second voice message address and storing the telephonic voice message data for retrieval therefrom.

20 12. The method of claim 11 in which the specified voice message transmission instruction includes transmitting the telephonic voice message data to a third voice message destination having a third voice message address different from the second voice message address, or determining whether the first voice message address is included in a first preselected set of at least one acceptable origin address and transmitting the telephonic voice message data to the second voice message address

25 only if the first voice message address is included in the first preselected set, or determining whether the first voice message address is included in a second preselected set of at least one unacceptable origin address and

30 blocking transmission of the telephonic voice message data

35



to the second voice message address whenever the first voice message address is included in the second preselected set.

13. The method of claim 11 in which the  
5 specified voice message transmission instruction includes determining whether the first voice message address is included in a third preselected set of at least one address and assigning the voice message data a delivery  
10 priority for prioritizing retrieval of the voice message data from the second voice message address whenever the first voice address is included in the third preselected set, or prohibiting the voice message data from being copied or forwarded.

14. A method of controlling transmission of  
15 telephonic voice message data originating from a first voice message address within a first telephonic voice message system and directed to a destination voice message address within a second telephonic voice message system that is operable independently of the first telephonic  
20 voice message system, comprising:

generating telephonic voice message data at the first telephonic voice message system;

delivering the destination voice message address to the first telephonic voice message system;

25 communicating between the first and second telephonic voice message systems to determine whether the destination voice message address is a valid address on the second telephonic voice message network and whether the destination voice message address is associated with a  
30 specified voice message transmission instruction for controlling transmission of the telephonic voice message data;

whenever the destination voice message address is not a valid address on the second telephonic voice

message network, providing an invalid address indication to the first voice message address;

whenever the destination voice message address is associated with the specified voice message transmission instruction for controlling transmission of the telephonic voice message data, transmitting the telephonic voice message data in accordance with the specified voice message transmission instruction; and



whenever the destination voice message address is not associated with the specified voice message transmission instruction for controlling transmission of the telephonic voice message data, transmitting the telephonic voice message data to the destination voice message address and storing the telephonic voice message data for retrieval therefrom.

15. The method of claim 14 in which an interface node provides data communication between the first and second telephonic voice message systems, the interface node cooperating with the first and second telephonic voice message systems to determine whether the second voice message address is associated with a specified voice message transmission instruction for controlling transmission of the telephonic voice message data.

16. The method of claim 15 in which communicating between the first and second telephonic voice message systems includes transmitting the second voice message address from the first telephonic voice message system to the interface node, determining whether the second voice message address is associated with a specified voice message transmission instruction, and sending a query from the interface node to the second telephonic voice message system as to whether the second voice message address is associated with a specified voice message transmission instruction.


17. The method of claim 14 in which first and second interface nodes provide data communication between the first and second telephonic voice message systems, the first and second interface nodes cooperating with the first and second telephonic voice message systems to determine whether the second voice message address is associated with a specified voice message transmission instruction for controlling transmission of the telephonic voice message data.

10

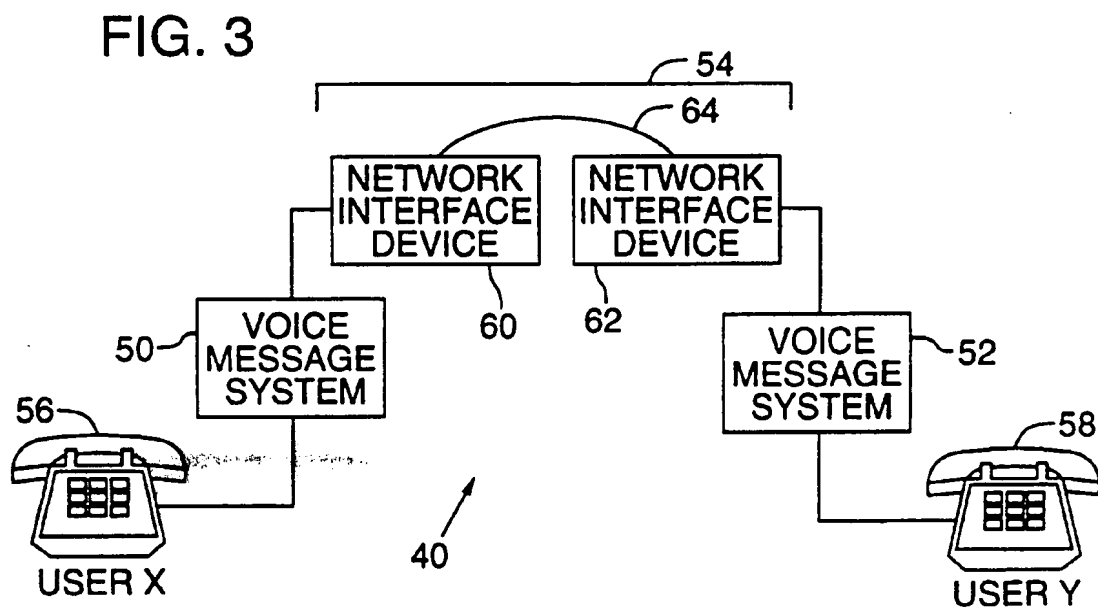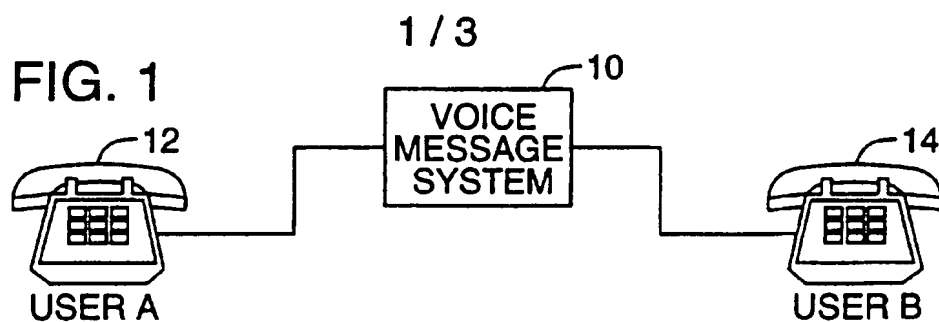

2 / 3

FIG. 2

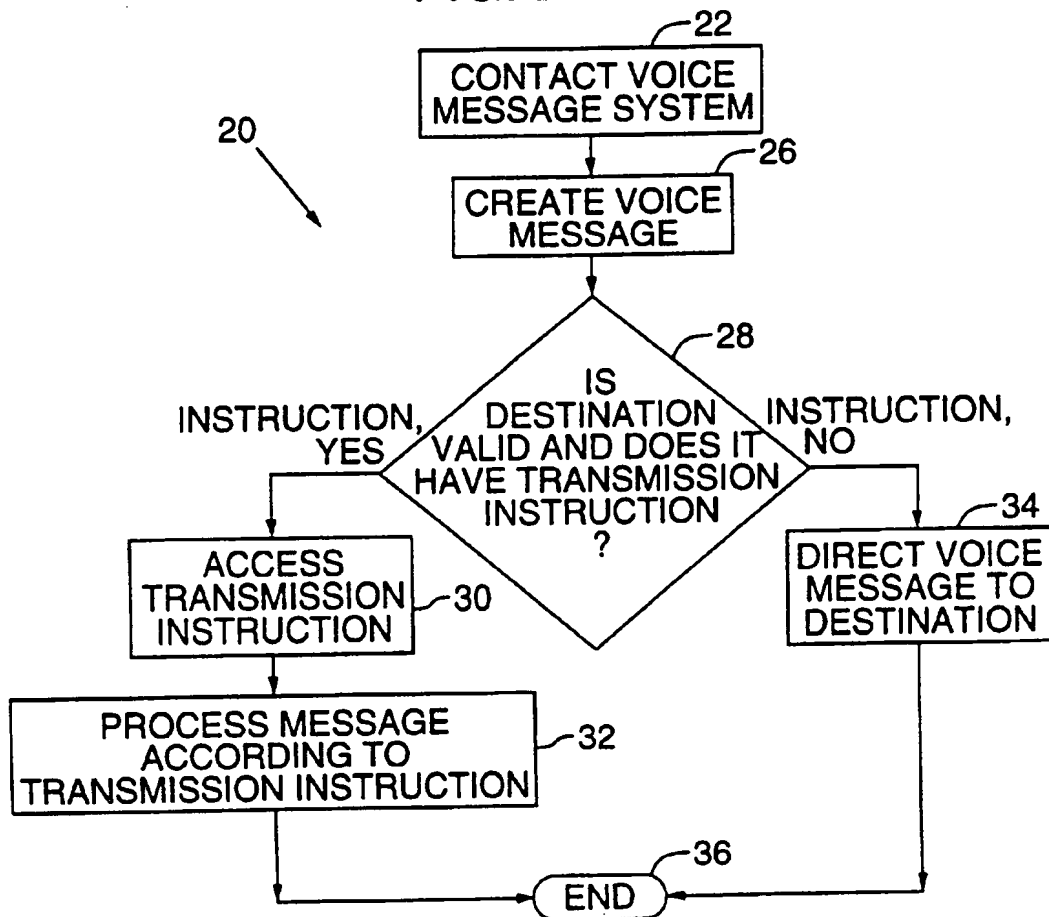

3 / 3

FIG. 4

